



# TA8KC

802.11a/b/g/n/ac dual-band indoor high-performance AP



Intelligent  
Rate Control



2x2 MiMo



High  
Throughput



Gigabit  
Ethernet



Hardware  
Watchdog



POE+

## Release Notes

Date	Version Number	Editor	Change log	Remarks
2020-05-29	V1.0	Guifang	Create	
2020-08-17	V1.1	Guifang	Modify power consumption	

## Product Feature

- Supports 802.11 a/b/g/n/ac standard
- The highest transmission rate is 867Mbps (5G) & 300Mbps (2.4G)
- Coverage: 0~150m
- Integrated antenna, quick installation
- Supports bridge and router modes. Network architecture can be flexibly deployed by adjusting the network mode of devices
- Intelligent QoS wireless multimedia optimization technology, providing high priority transmission levels for voice and video
- Supports firmware backup. The mechanism can prevent the device from stopping work in extreme conditions
- Supports web page management, making installation and maintenance of equipment more convenient
- Supports wireless controller (AC) management, realize remote centralized configuration and upgrade management \*
- Supports 802.3at protocol (POE+)
- IP41

\*Wireless controller needs to be purchased separately

## Accessory List

					
Device	Mount bracket	Screw bag	In wall POE adaptor	QIG	QC

## Application Scenario



## Specifications

Hardware	Dimensions(mm)	150mmx150mmx36mm
	Weight(kg)	0.203kg
	Installation	Ceiling-mounted
	Protection Level	IP41
	Antenna Gain	3dBi
	Antenna Type	Dual band omnidirectional antenna
	Power Supply	48V POE+/DC 48V
	Max Power Consumption(W)	12W
	Average Power Consumption(W)	9W
	CPU	IPQ4028
	DDR & Memory	256MB DDR3L 32MB Flash
	Physical Interface	2*10/100M/1000M
	Indicator Light	1* Breathing light 2* Wireless status light
	Maximum Transmitted Power	2.4G: 25dBm 5G: 24dBm

	Working Temperature	-20°C~55°C
	Storage Temperature	-40°C~85°C
	Working Humidity	5%~95%RH Non-condensing
	Surge	POE/GE: CM 4KV , DM 2KV
	ESD Protection	Contact 6KV , Air 8KV
Software	Protocol	802.11a/b/g/n/ac
	Frequency	2.4G: 2412~2472MHz (China) 2412~2462MHz (United states) 2412~2472MHz (Most countries) 5G: 5180~5320MHz、 5745~5825MHz (China) 5180~5320MHz、 5500~5720MHz、 5745~5825MHz (United States) 5160~5340MHz、 5480~5720MHz、 5745~5865MHz (India) 5160~5340MHz、 5480~5720MHz、 5745~5825MHz (United Arab Emirates) 5745~5805MHz (Indonesia) * The above frequencies need specific version support
	Operating Mode	AP, Station, WDS AP, WDS Station
	Security	WPA2-PSK, Hidden SSID, IP/MAC Filtering
	Network Mode	Bridge/ Router
	Management	Support Web/AC/SNMP
	Other	Timed restart, Support VLAN, QoS, Watchdog


## RF Specification

TX Power				Sensitivity		
	Date Rate	Avg. TX	Tolerance	Data Rate	Sensitivity	Tolerance
11b/g/n	1 Mbps	22dBm	+/- 2dBm	1 Mbps	-93dBm	+/- 2dBm
	11 Mbps	22dBm	+/- 2dBm	11 Mbps	-86dBm	+/- 2dBm
	6 Mbps	22dBm	+/- 2dBm	6 Mbps	-88dBm	+/- 2dBm
	54 Mbps	19dBm	+/- 2dBm	54 Mbps	-70dBm	+/- 2dBm
	HT20 MCS0(combination)	25dBm	+/- 2dBm	HT20 MCS0	-88dBm	+/- 2dBm
	HT20 MCS7(combination)	21dBm	+/- 2dBm	HT20 MCS7	-68dBm	+/- 2dBm

	HT40 MCS0(combination)	25dBm	+/- 2dBm	HT40 MCS0	-86dBm	+/- 2dBm
	HT40 MCS7(combination)	21dBm	+/- 2dBm	HT40 MCS7	-65dBm	+/- 2dBm
11a/n	6 Mbps	21dBm	+/- 2dBm	6 Mbps	-88dBm	+/- 2dBm
	54 Mbps	18dBm	+/- 2dBm	54 Mbps	-70dBm	+/- 2dBm
	HT20 MCS0(combination)	24dBm	+/- 2dBm	HT20 MCS0	-88dBm	+/- 2dBm
	HT20 MCS7(combination)	20dBm	+/- 2dBm	HT20 MCS7	-67dBm	+/- 2dBm
	HT40 MCS0(combination)	24dBm	+/- 2dBm	HT40 MCS0	-85dBm	+/- 2dBm
	HT40 MCS7(combination)	20dBm	+/- 2dBm	HT40 MCS7	-65dBm	+/- 2dBm
11ac	VHT20 MCS0(combination)	24dBm	+/- 2dBm	VHT20 MCS0	-88dBm	+/- 2dBm
	VHT20 MCS8(combination)	19dBm	+/- 2dBm	VHT20 MCS8	-64dBm	+/- 2dBm
	VHT40 MCS0(combination)	24dBm	+/- 2dBm	VHT40 MCS0	-84dBm	+/- 2dBm
	VHT40 MCS9(combination)	18dBm	+/- 2dBm	VHT40 MCS9	-61dBm	+/- 2dBm
	VHT80 MCS0(combination)	24dBm	+/- 2dBm	VHT80 MCS0	-82dBm	+/- 2dBm
	VHT80 MCS9((combination)	18dBm	+/- 2dBm	VHT80 MCS9	-57dBm	+/- 2dBm

\* The combined power in the chart above is the result of tested single power plus 3dB


## Dimensions

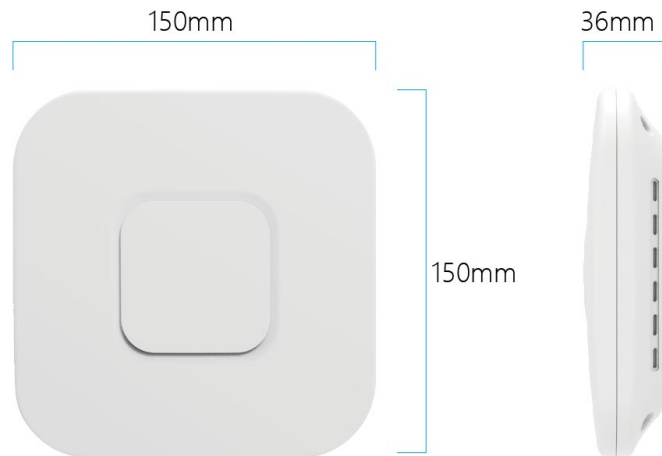

## Interface



## Installation

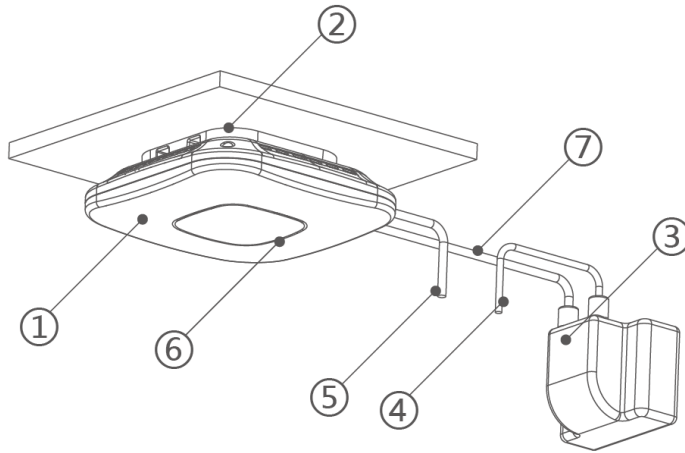

1. AP Main Device
2. Mounting bracket
3. POE Adaptor
4. The LAN port of POE adaptor can be connected with the other devices
5. The LAN1 port on the main device can be connected with the other devices
6. Breathing light
7. The POE port of POE adaptor should connect to the POE port on the main device

## Antenna Polar Plots

