



TB9L

802.11a/n/ac Outdoor tri band wireless base station



TDMA+



Intelligent
Rate Control



ACK Time-out
Adjustment




2x2 MiMo




High
Throughput



Point-to-
Multi-Point



Long Distance
Coverage



Gigabit
Ethernet



Hardware
Watchdog



POE+

Release Notes


Date	Version Number	Editor	Change log	Remarks
2020-08-20	V1.0	Guifang	Create	

Product Feature

- Supports 802.11 a/n/ac standard
- The highest transmission rate is 2.6Gbps
- External antenna (optional), transmission distance: 0 ~ 5km
- Built-in VTrans technology, including
 - 1) TDMA+: eliminate the performance degradation caused by hidden terminals and maximize the wireless transmission efficiency
 - 2) Frequency (channel) expansion function: eliminate interference caused by the same frequency and adjacent frequency through more frequency selection
 - 3) Band width selection: by adjusting the channel width, the overlapping parts of spectrum can be avoided and the influence of interference by other channels can be reduced
 - 4) AutoAck function: intelligently calculate the ACK value required for long-distance transmission to achieve the optimal performance at this distance
- Supports bridge and router modes. Network architecture can be flexibly deployed by adjusting the network mode of devices
- Intelligent QoS wireless multimedia optimization technology, providing high priority transmission levels for voice and video
- Supports firmware backup, the mechanism can prevent the device from stopping work in extreme conditions
- Supports web page management, making installation and maintenance of equipment more convenient
- Supports wireless controller (AC) management, realize remote centralized configuration and upgrade management
- Supports 802.3at protocol (POE+)
- IP66

*Wireless controller needs to be purchased separately

Application Scenario

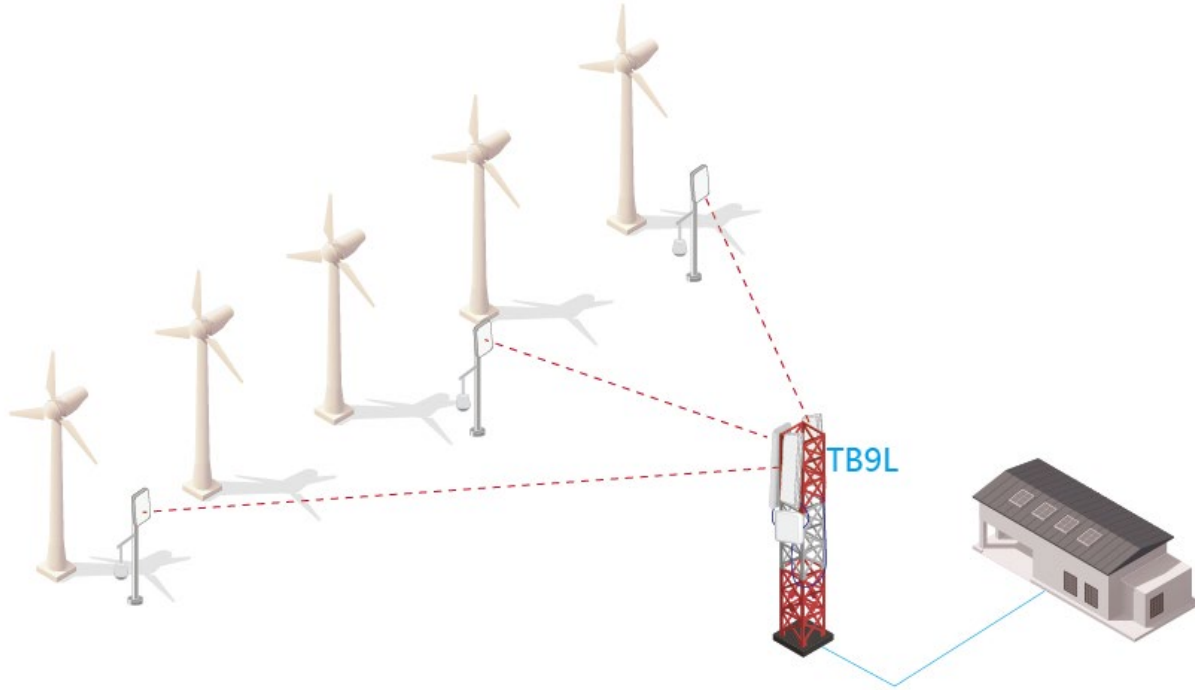

Specifications

Hardware	Dimensions(mm)	200x200x50mm
	Weight(kg)	1.3kg
	Installation	Pole mounting 30mm≤Diameter≤50mm
	Protection Level	IP66
	Antenna Gain	16dBi
	Beam Width	H 120°, V 9°
	Power Supply	48V POE+
	Max Power Consumption(W)	15W
	Average Power Consumption(W)	12W
	CPU	IPQ4029
	DDR & Memory	512MB DDR3L, 32MB Flash
	Network Interface	1*10/100/1000Mbps、1*1000Base-X SFP
	Radio Interface	6*N type connector (support 5G*3)
	Maximum Transmitted Power	27dBm
	Working Temperature	-40°C~70°C
	Storage Temperature	-40°C~85°C


	Working Humidity	5%~95%RH Non-condensing
	Surge	POE/GE: CM 4KV , DM 2KV
	ESD Protection	Contact 6V, Air 8V
	Wind Survivability	150km/h
Software	Protocol	802.11a/n/ac
	Frequency	5180~5320MHz、 5745~5825MHz (China) 5180~5320MHz、 5500~5720MHz、 5745~5825MHz (United States) 5160~5340MHz、 5480~5720MHz、 5745~5865MHz (India) 5160~5340MHz、 5480~5720MHz、 5745~5825MHz (United Arab Emirates) 5745~5805MHz (Indonesia) * The above frequencies need specific version support
	Operating Mode	AP, Station, WDS AP, WDS Station
	Security	WPA2-PSK, Hidden SSID, IP/MAC Filtering
	Network Mode	Bridge/ Router
	Management	Support Web/AC/SNMP
	Other	Timed restart, Support VLAN, QoS, Watchdog

RF Specification


TX Power				Sensitivity		
	Date Rate	Avg. TX	Tolerance	Data Rate	Sensitivity	Tolerance
11a/n	6 Mbps	24dBm	+/- 2dBm	6 Mbps	-91dBm	+/- 2dBm
	54 Mbps	22dBm	+/- 2dBm	54 Mbps	-73dBm	+/- 2dBm
	HT20 MCS0(combination)	27dBm	+/- 2dBm	HT20 MCS0	-91dBm	+/- 2dBm
	HT20 MCS7(combination)	24dBm	+/- 2dBm	HT20 MCS7	-70dBm	+/- 2dBm
	HT40 MCS0(combination)	27dBm	+/- 2dBm	HT40 MCS0	-88dBm	+/- 2dBm
	HT40 MCS7(combination)	24dBm	+/- 2dBm	HT40 MCS7	-68dBm	+/- 2dBm
11ac	VHT20 MCS0(combination)	27dBm	+/- 2dBm	VHT20 MCS0	-91dBm	+/- 2dBm
	VHT20 MCS8(combination)	23dBm	+/- 2dBm	VHT20 MCS8	-67dBm	+/- 2dBm
	VHT40 MCS0(combination)	27dBm	+/- 2dBm	VHT40 MCS0	-87dBm	+/- 2dBm
	VHT40 MCS9(combination)	23dBm	+/- 2dBm	VHT40 MCS9	-64dBm	+/- 2dBm
	VHT80 MCS0(combination)	27dBm	+/- 2dBm	VHT80 MCS0	-85dBm	+/- 2dBm
	VHT80 MCS9(combination)	23dBm	+/- 2dBm	VHT80 MCS9	-60dBm	+/- 2dBm

* The combined power in the chart above is the result of tested single power plus 3dB


Dimension

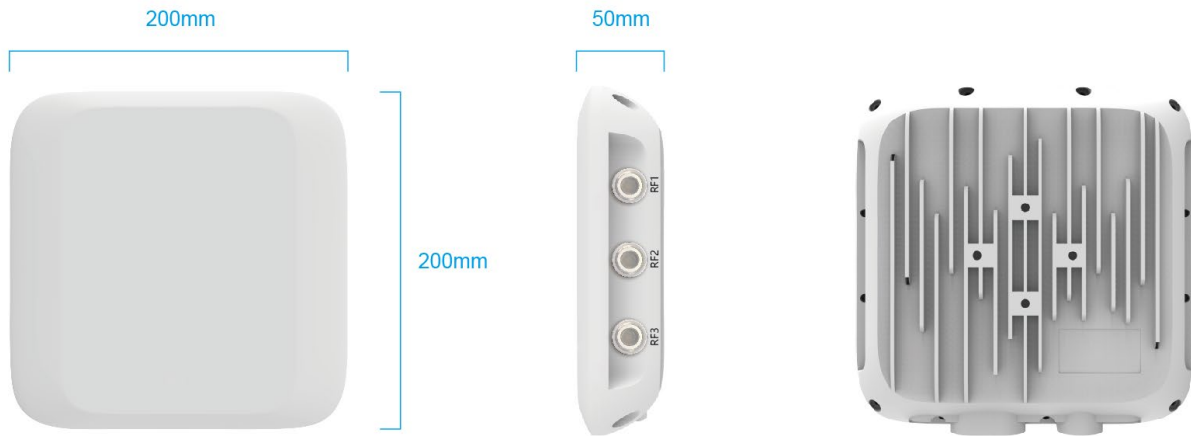

Interface

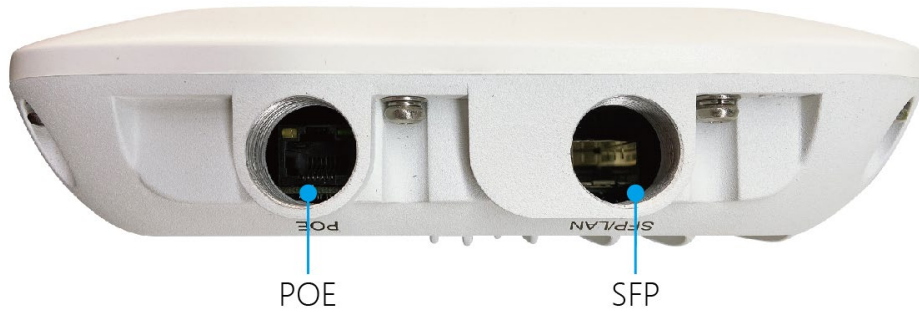

Installation

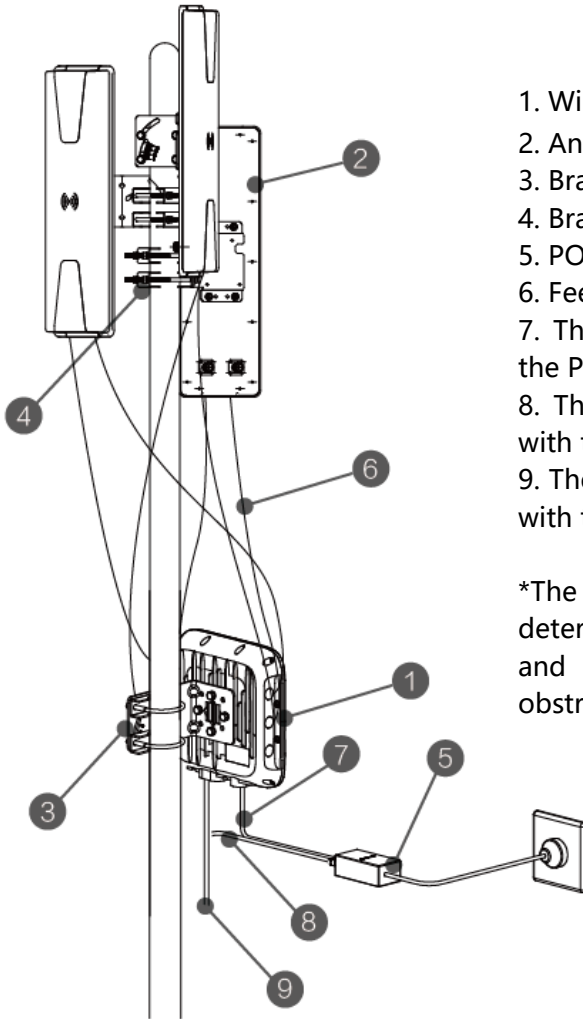

1. Wireless Transmission Device
2. Antenna
3. Brackets of Device
4. Brackets of Antenna
5. POE Adaptor
6. Feeder
7. The POE port of POE adaptor should connect to the POE port on the main device
8. The LAN port of POE adaptor can be connected with the other devices
9. The SFP port on the main device can be connected with the other devices

*The actual installation height needs to be determined according to the transmission distance and the installation environment, and there is no obstruction between the two points.

Antenna Polar Plots

